




IR019B Remote Tone Speaker Specification Sheet

IL456
Section E
Rev. 11 - 06/2004

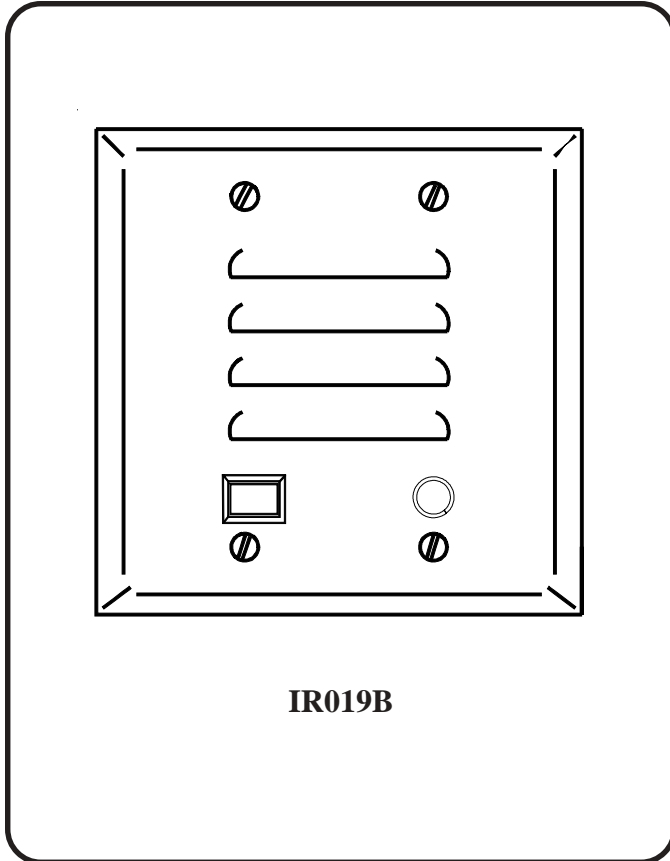

FEATURES

The IR019B Remote Tone Speaker provides for remote tone annunciation when connected directly in parallel with a TekTone® CM800 Series Annunciator Panel and PK2019 Control Unit. The tone speaker features a momentary contact tone-off button for tone silencing. Depressing the tone-off button silences the tone at all IR019B locations. The tone-off light remains illuminated while tone-silencing is enabled. When the emergency initiating device has been reset, the tone-off will automatically reset.

- Automatic tone-off reset
- Reliable and rugged design

SPECIFICATIONS

Dimensions: Height: 4.5" (115 mm)
 Width: 4.5" (115 mm)

Finish: Satin brushed stainless steel

Controls: Individual replaceable push buttons
 with self-wiping contacts

Indicators: 28 volt red light

Speaker/Mic: 45-ohms, 2.5"

Connections: Pigtails

Housing: Standard 2-gang electrical box

ARCHITECTS' AND ENGINEERS' SPECIFICATION

Remote tone speaker shall be TekTone® IR019B or approved equal.

Model IR019B shall include a momentary action tone-off button and 2.5" speaker/microphone mounted on a rugged stainless steel panel. Model IR019B shall also include a tone-off light. Remote tone speakers shall provide remote tone annunciation when used in conjunction with TekTone® CM800 Series Annunciator and PK2019 Control Unit.

REQUIRED COMPONENTS

CM800	Annunciator Panel
PK2019	Control Unit
SS106	Transformer

www.tektone.NET

277 Industrial Park Road • Franklin, NC 28734 • Phone (828) 524-9967 • Fax (828) 524-9968

Email: tektone@tektone.net • Technical Assistance Email: teksupt@tektone.net

TekTone®'s quality system is registered by UL® to the ISO 9001:2000 standard. (File #A10766.)